

# Pacific CARRYME

## Owner manual



### Assembly Procedures

#### Step 1:

Unpack the box – a 95% assembled bike, a seat assembly, and a pair of pedals.



#### Step 2:

Stand the bike up on its rear wheel and trolley wheels. Insert both handlebar ends into the center tube, close the QR levers.



#### Step 3:

Rotate the seat tube QR lever up and out from behind the QR Hook on the frame. Open the QR Lever on the seat tube, insert the seat post and close the QR lever.



Note:  
Do not raise the seat higher than the minimum insertion mark.

#### Step 4:

Swing the seat tube backwards. Lock the seat stays to the seat tube.



Seat stay clamp

#### Step 5:

Open the spring latch, slide the head tube clamp toward the bottom of the head tube, and tighten the wing bolt with your fingers.



#### Step 6:

Open the QR lever on top of the stem, raise the stem to desired height, and close the QR lever.



#### Step 7:

Install the pedals. Turn the right pedal clockwise and the left pedal counterclockwise to tighten.



#### Step 8:

Adjust the height and alignment of handlebar and seat.



Note:  
Do not raise the seat higher than the minimum insertion mark.

### How to fold


#### Step 1:

Loosen the head tube clamp bolt one turn, slide the head tube clamp to top by pushing the seat backward, latch the head tube to the frame.



#### Step 2:

Un-lock the seat stays from the seat tube, pull the seat toward the handlebar, open the seat QR lever, lower the seat and turn it side-ways, latch the QR lever to the frame.

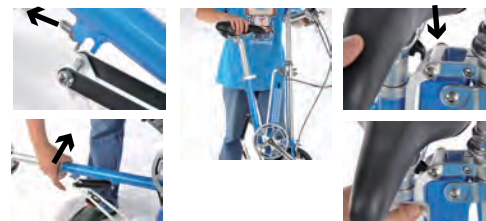

#### Step 3:

Open the stem QR lever, lower the stem and turn the handlebar sideways, close the QR lever.



#### Step 4:

Fold the pedals.



You are now ready to pull/push it or carry it!



- Don'ts!**
- Don't exceed the maximum load limits.
  - Don't carry a person or a pet on the rear carrier.
  - Don't perform stunt riding.
  - Don't jump over curves.
  - Don't raise the handlebar stem beyond the height limit.
  - Don't raise the seat post beyond the height limit.
  - Don't over stress any of the QR levers.
  - Don't ride it off-road.

#### Important Safety Checklist!

- Check and make sure that all clamps are properly tightened.
  - 1) The handlebars should be tight with no play.
  - 2) The head tube clamp should be fully tightened not allowing rotation or play.
  - 3) The seat stay clamp should be fully tightened (step 4).
  - 4) The seat post clamp should be fully tightened not allowing any rotation or sliding.
- Do not raise the handlebar stem and seat post up beyond the maximum insertion mark.
- Always wear a helmet and abide by all traffic regulations and courtesies!
- Rear carrier max. loading: 10kg / Average speed: 13km/h  
Max. height: 185cm / Max. loading: 80kg

#### Important Maintenance Checklist!

- 1st service inspection after at most 300 km or at latest one months after purchase, repeat every 3 months.
- Parts need lubrication: chain, headset, bearings.
- Parts prohibit lubrication: seatpost, seat tube, adjustable stem, rims.
- Repeat lubrication every half month or after at most 150 km ride.
- Apply lubrication immediately after washing or riding in rainy day.



236-11 Hsia Chuan Tze, Yung An, Hsin Wu, Taoyuan, Taiwan  
Tel: +886-3-4861231 Fax: +886-3-4861215  
Web: <http://www.pacific-cycles.com>  
Email: [team@pacific-cycles.com](mailto:team@pacific-cycles.com)